

VANNE PASSAGE DIRECT


VANNE LAITON À PASSAGE DIRECT, CORPS ET MANCHONS MATRICÉ À CHAUD - VOLANT DE MANŒUVRE ROUGE - JOINT D'ÉTANCHEITÉ ET PRESSE ETOUPE EN PTFE - T° : -10°C à +80°C



VANNE PASSAGE DIRECT

RÉFÉRENCE	FILETAGE	D (mm)	t (mm)	H (mm)	L (mm)	PN (bar)	POIDS (en kg)
VPD08	F X F 1/4"	11	8	67	33	16	0,150
VPD13	F X F 3/8"	13	8	67	33	16	0,175
VPD16	F X F 1/2"	15	9,5	68	38	16	0,203
VPD19	F X F 3/4"	19	11,5	75	43	16	0,271
VPD25	F X F 1"	24	12	86,5	47,2	16	0,390
VPD32	F X F 1"1/4	32	13	98	52	16	0,590
VPD38	F X F 1"1/2	39	15	115	57	16	0,760
VPD50	F X F 2"	47	17	145	65	16	1,295
VPD65	F X F 2"1/2	60	13	156	66	10	1,750
VPD80	F X F 3"	70	22	184	84	10	2,450
VPD100	F X F 4"	93	17	227	85	10	4,400

1/4" - 1"

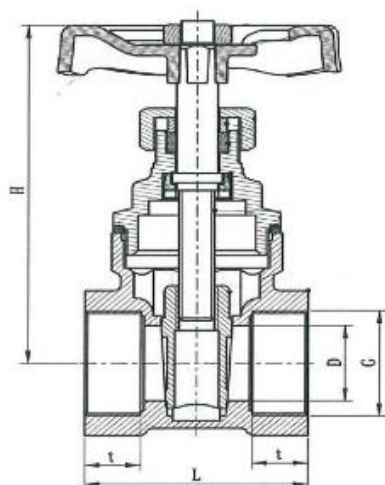

1"1/4 - 4"

